


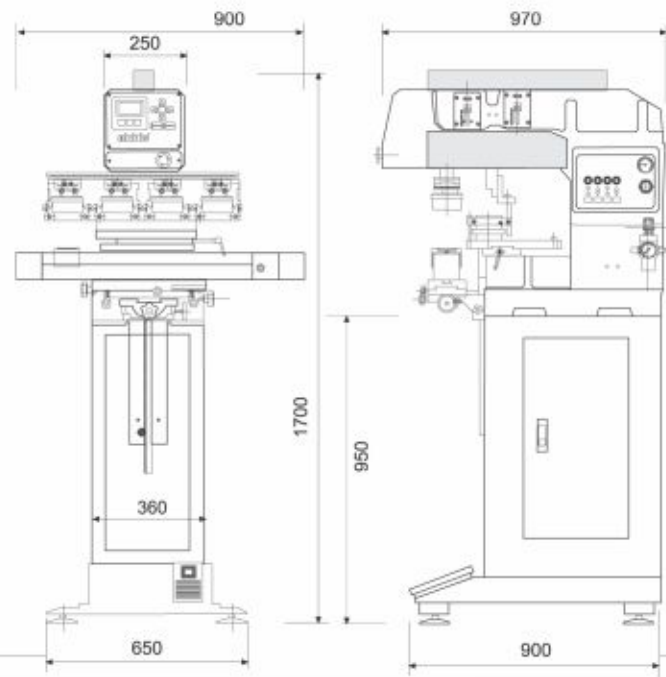

Access to Printing Solutions

Sepas F.Z.C

No 18, Block D, Ajman Free Zone P.O.Box: 21009, Ajman, UAE

Tel: +971 (0)6 7447852 Fax: +971 (0)6 7447853 Email: uae@sepas.com www.sepas.com

Our famous standard PP series pad printer is available for single colour up to 4 colour applications. Built to last with its rigid aluminium casting frame, PP-150 can easily be combined with automation accessories for more capabilities. The user can choose from single, two-colour, multi-colour or transverse inking, linear shuttles, conveyor, and more. These components are 100% user installable and could be purchased in any combination, at the same time as the PP-150 base unit, or later.

Technical Specifications	1 Colour	2 Colour	3 Colour	4 Colour
Shuttle Stations	1+2	1+3	1+2+3	1+2+3+4
Stations Gap	114,4 mm	228,8 mm	114,4 mm	114,4 mm
Plate Size (CMIC)	100 x 300 mm	300 x 485 mm	300 x 485 mm	300 x 485 mm
Max. Product Size	250 x 500mm	200 x 300mm	80 x 200mm	80 x 200mm
Max. Print Area (CMIC)	Ø 80mm	Ø 80mm	Ø 80mm	Ø 80mm
Max. Print length	350 mm	350 mm	350 mm	350 mm
Max. Speed	900 Cycles/Hr	800 Cycles/Hr	700 Cycles/Hr	600 Cycles/Hr
Max. Pad Pressure	1800N@6 Bar	1800N@6 Bar	1800N@6 Bar	1800N@6 Bar
Air consumption	220 Litre/min.(approx)	220 Litre/min.(approx)	220 Litre/min.(approx)	220 Litre/min.(approx)
Power	220V 50/60Hz 50W	220V 50/60Hz 50W	220V 50/60Hz 50W	220V 50/60Hz 50W
Size (LxWxH)	H. Cup	750x1100x1700 mm	With Shuttle	900 x 970 x 1700 mm
Weight	200 kg (approx)	200 kg (approx)	200 kg (approx)	200 kg (approx)

PP-150

Pad Printing Machine

Optional Accessories

- Servo Motor Shuttle with PLC Motherboard
- Larger Printing Area up to Ø12 cm in PP-200 Model

Features

- 4-colour user-friendly automatic pad printer
- Flat and Round printing
- Pneumatic power operation
- Adjustable timing for printing cycle
- Continuous printing action with pause/resume
- Multi language display
- Microprocessor, membrane switch control panel
- Automatic error finder
- Auto air blower for easy colour registration
- Emergency interrupt
- Close system (CMIC) and open tray
- Thin plate, polymer cliché and steel plate
- Ink mixing mode
- Single-cycle mode
- Change ink cup or open tray in seconds
- Independent ink and print stroke settings
- Programmable for various requirements
- Single pickup / double print option
- Double pickup / single print option
- Independently adjustable print down stroke in four-colour mode
- Pad down and hold feature (print stroke only)
- Light & Rigid aluminium casting machine frame

